



5-SHELF RACK W/ CABINET

OWNER'S MANUAL



WARNING: Read carefully and understand all **INSTRUCTIONS** before operating. Failure to follow the safety rules and other basic safety precautions may result in serious personal injury.

Item # 150507

Thank you very much for choosing a NORTHERN TOOL + EQUIPMENT CO., INC. Product! For future reference, please complete the owner's record below:

Model: _____ Purchase Date: _____

Save the receipt, warranty and these instructions. It is important that you read the entire manual to become familiar with this product before you begin using it.

This machine is designed for certain applications only. Northern Tool + Equipment cannot be responsible for issues arising from modification. We strongly recommend this machine is not modified and/or used for any application other than that for which it was designed. If you have any questions relative to a particular application, DO NOT use the machine until you have first contacted Northern Tool + Equipment to determine if it can or should be performed on the product.

For technical questions please call **1-800-222-5381**.

SAFETY INSTRUCTIONS

These units should be placed on a level surface. Failure to do so can result in poor product performance or create a possible safety hazard. This unit should be securely anchored to a wall or floor with suitable fasteners, which are included. Do not use this unit for anything other than the manufactures intended purpose. **DO NOT STAND ON ANY PART OF THE UNIT, OR USE IT AS A LADDER.** Evenly distribute the weight on each level and always keep the heavier loads on the bottom. Use care when working with metal parts. Do not exceed the maximum capacity of 300 lbs. for each shelf. Keep children away; do not allow them to play with or crawl/climb on unit.

GENERAL INSTRUCTIONS


Assembly is done with the rivets of the beams and braces fitting into the slots of the post. A rubber mallet may be used on the beams and braces to seat the rivets properly. A hammer can also be used providing one uses a cloth or a block of wood between the hammer head and the parts to prevent damage. Tap gently and be sure the rivets are straight and fully engaged. Periodically inspect the general condition of the rack for loose frame connections, undistributed loads, shelving deformations and any other conditions that may affect the rack's stability and performance.

ASSEMBLY INSTRUCTION

Required Tools (Rubber Mallet, Philips Screwdriver, Wrench)


Step 1: (Note: Post are directional. The slot must point down.)

Assemble two (2) posts with one (1) brace. Skipping one slot from the bottom of the post (see figures A&B), Place the rivets into post with the slot pointing down, and with the shelf ledge of the brace facing up, and tap lightly to seat rivets (see figure A). Repeat with two (2) posts and one (1) brace. Assemble the two (2) posts end units with one (1) beam for the back, and one (1) beam for the front (see figure C). Skip one hole from the bottom of post, tap lightly to seat rivets.

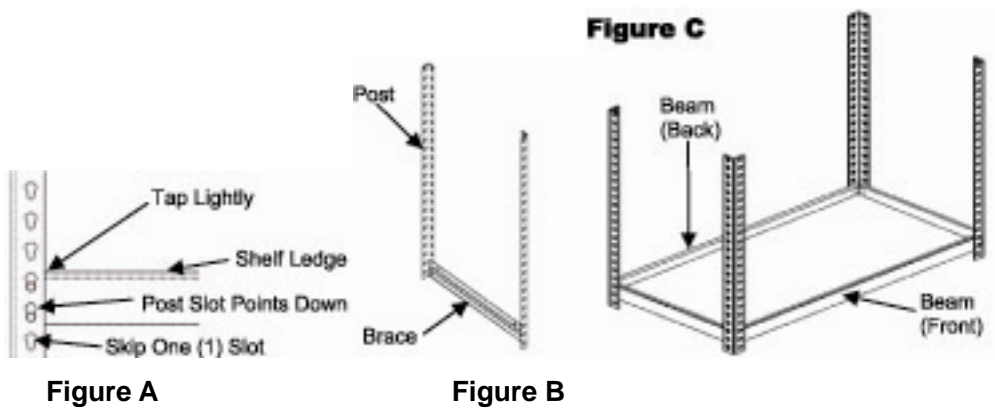

STEP 2 (Note: Post are directional. The slot must point down.)


Add a laminate shelf to the level previously built, then add the second level using two (2) beams, and two (2) braces in post slots thirteen (13), and fourteen (14) counting up from the bottom. Add the laminate shelf. Assemble the top post to the bottom post by using two (2) beams, and the two (2) braces. One (1) rivet from each beam and brace must be placed in the top hole of the bottom post, and the bottom hole of the top post (see figure D)

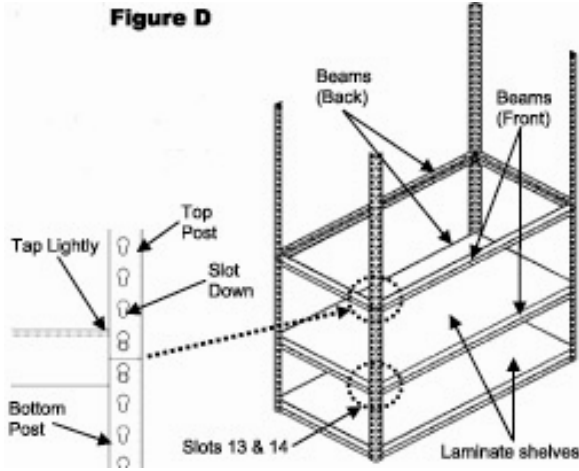

IMPORTANT NOTE: MAKE SURE ALL RIVETS ARE FULLY SEATED INTO THE POST SLOTS.

STEP 3 (Note: Post are directional. The slot must point down.)

Add side panels to the sides of the unit by inserting the tabs of the panels into the slots of the post. Push the panes down so the tabs fully engage into the post slots (see figure E). Assemble the back panels together by inserting the tabs from one panel into the slot holes of the other so that the two panes over lap and lock together (see figure F). Install the back panels to the unit by following the same procedure for the side panels (see figure G).

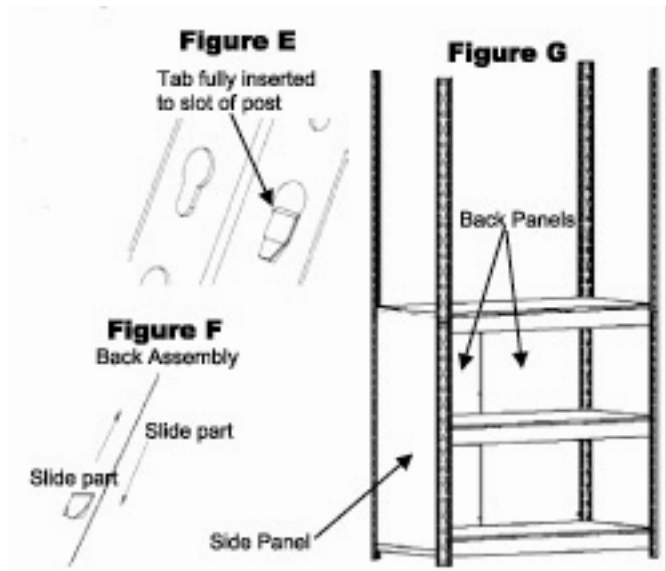

STEP 4 (Note: Post are directional. The slot must point down.)


Add a laminate shelf to the level previously built. Using the last of the beams and braces, add the final two (2) levels to the unit. Add laminates shelves to the levels built, then align hinges of the doors to the sixth and twentieth post sots from the bottom. Fasten hinges to the post using one (1) per bolt / nut provided (See figure H).

Optional anchor hardware is supplied with this unit so the unit can be fastened to a wall if necessary. See instructions for installing anchor hardware.

Anchor Hardware Instructions

Wood Stud Installation- Drill an applicable small pilot hole even with the hole of the post into the wood stud. Use a drill or screwdriver, and fasten the screw and washer through the hole of the post, and into the wood stud.

Wall Board Installation- Drill an applicable hole even with the hole of the post into the wall board. Insert the wall anchor into the wall board. Use a drill or screw driver, and fasten the screw and washer through the hole of the post, and into the wall anchor.

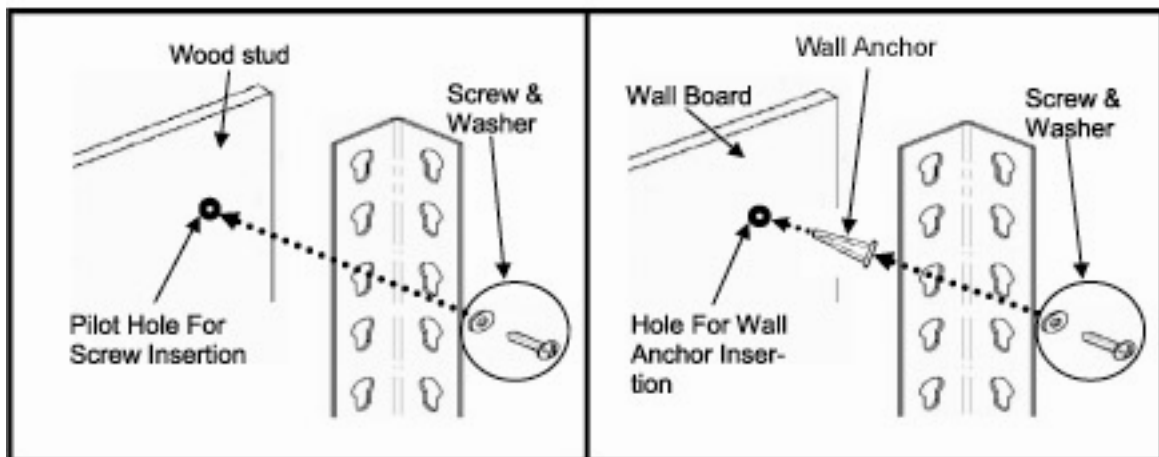

Parts List

| Description | Qty. | Part Number | Part Size |
|----------------------------|------|-------------|-------------------|
| Beams | 10 | RUBE3502 | 35 1/8" |
| Braces | 10 | RUBE1702 | 17 1/8" |
| Post | 8 | RUPT3602S | 36" |
| Side Panels | 2 | RUSD3317 | 17 3/8" × 34" |
| Left Back Panel | 1 | RUBK3318L | 17 3/8" × 34" |
| Right Back Panel | 1 | RUBK3318R | 17 3/8" × 34" |
| Left Door (with handle) | 1 | SVRUDR3418L | 17 5/8" × 33 5/8" |
| Right Door (with handle) | 1 | SVRUDR3418R | 17 5/8" × 33 5/8" |
| Laminate Shelves | 5 | RPB21836LM | 17 1/2" × 33 1/2" |
| Nuts, Bolts | 4 | NB4 | N/A |
| Wall Anchor. Screw. Washer | 2 | N/A | N/A |
| Post Connector | 1 | PC101 | N/A |

For replacement parts and technical questions, please call **1-800-222-5381**.



Northern Tool + Equipment Co., Inc.
 2800 Southcross Drive West
 P.O. Box 1499 Burnsville, MN 55337-0499
 Made in China